



Control box with digital display for simple operation.

Translucent tank with a capacity 55 litres.

Treat over 1000 tonnes of forage with an application rate of 50 ml/t.

Stainless steel brackets with multiple mounting options.

3 way valve with drain tube.

Open flow pipe work with NO in line filters.



Digital Control


The control box automatically monitors and adjusts the pump to keep it's output constant, this enables the pump to deliver additive precisely at any harvesting rate of between 15 and 300 tonnes per hour.

Simple operation - Two switches - One control knob - Digital display


Select the application rate. Either 50 ml/t or 100 ml/t.



Enter the rate your forage will be picked up using the control knob displayed in t/h.




Scrolling bars shows the pump is achieving the application target rate.



If fitted, a table sensor can be used with the Selmech control box.



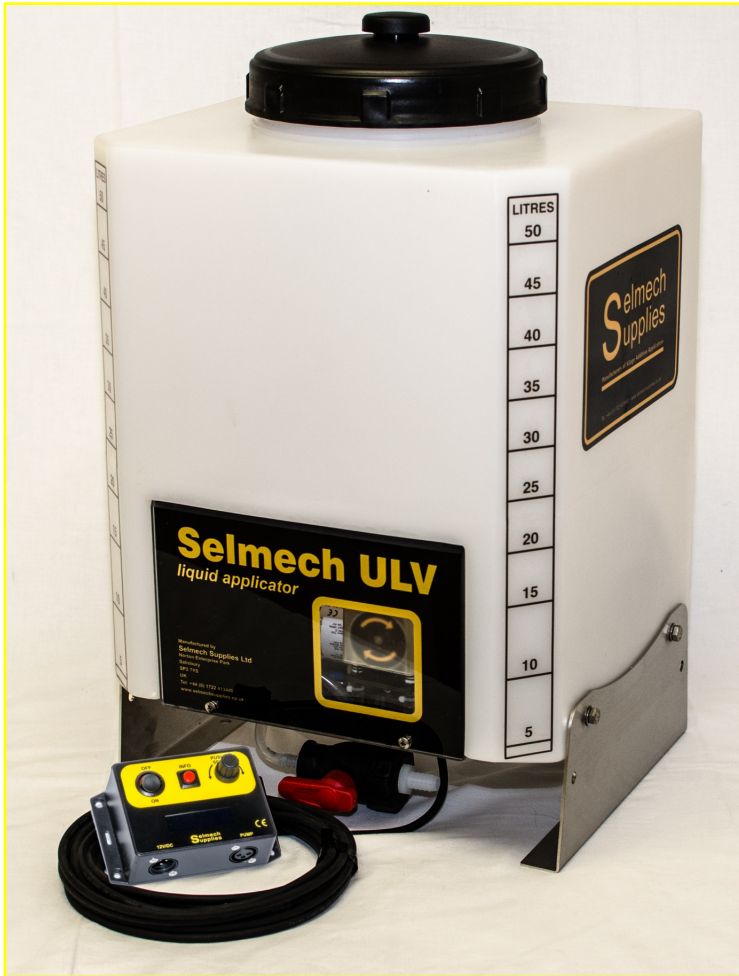

Advanced control box with digital back lit display.

Record of total litres dispensed.

Translucent tank with a capacity 55 litres (14 USG).

Treat over 1000 tons of forage with an application rate of 50ml/t. (1.7fl oz).

Stainless steel brackets with multiple mounting options.

3 way valve with drain tube.

Open flow pipe work with NO in line filters.



Digital Control

The control box automatically monitors and adjusts the pump to keep it's output constant, this enables the pump to deliver additive precisely at any harvesting rate of between 15 and 300 tons per hour.

it has a digital back lit display with memory to record the total litres dispensed.

Simple operation - One control knob - Digital display

Select the application rate between 20 to 250 ml/t (0.7 to 8.4 fl oz)



Enter the rate your forage will be picked up using the control knob displayed in tons an hour.



The total litres dispensed are stored in memory and can be zeroed.



If fitted, a table sensor can be used with the Selmech control box.

