



Dflow kit for harvesters balers and forage wagons.

Control box with digital display.

Easy set-up function.

Digital flow sensor.

Covered pump module.

Thru beam crop detection compatible.

Flow rate options

Dflow UV	0.10 to 1.0 litres per minute
Dflow LV	0.50 to 5.0 litres per minute
Dflow HV	1.00 to 10.0 litres per minute

UV 3.4 to 34.0 ounce/min.
LV 17.0 to 169.0 ounce/min.
HV 34.0 to 338. ounce/min.



Digital Control

The control box automatically monitors and adjusts the pump to keep it's output constant, this enables the pump to deliver additive precisely.

Simple operation

Settings for baler

Set you bale weight in Kg per Bale

Enter the application rate of your additive in litres per tonne.

Set how many bales made in an hour



Settings for harvester or wagon

Enter the application rate of your additive in litres per tonne.


Set how many tonnes an hour are picked up




The total litres dispensed are stored in memory and can be zeroed.





A thru-beam crop sensor can be used with the Selmech control box to – automatically turn the pump on and off.



Dimensions

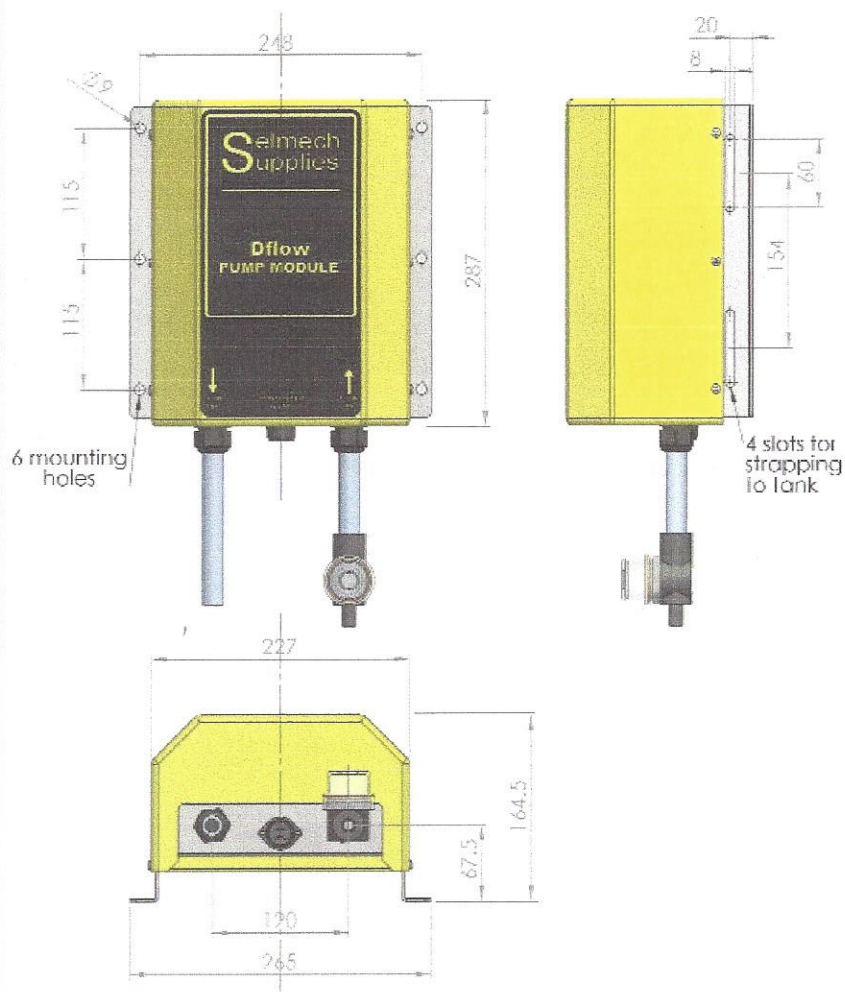

The Dflow module can be strapped to a barrel.

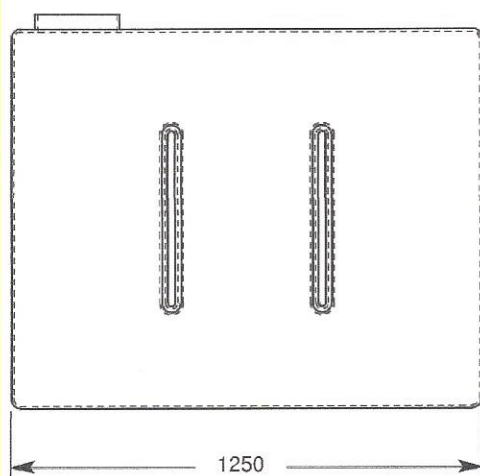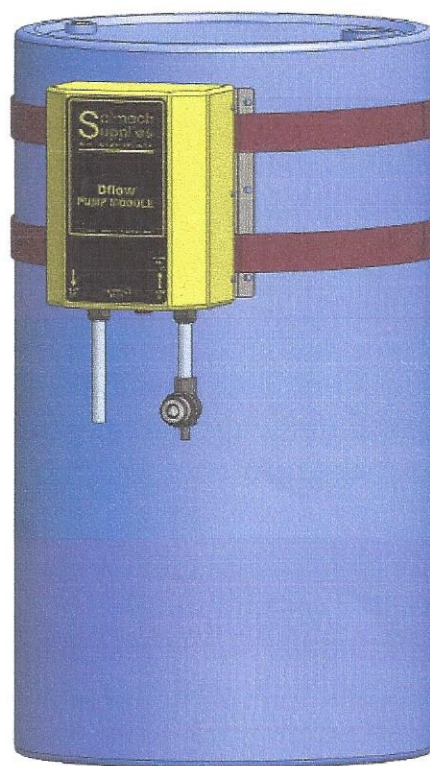

Selmech can also supply a 400 litre tank to be used in conjunction with a Dflow pump module .

Please note the tank does not come with any mounting brackets.